
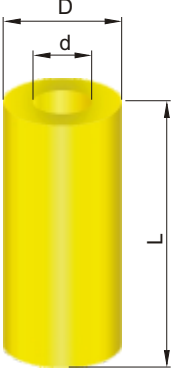
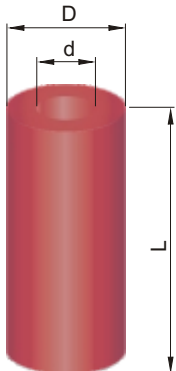


SPRĘŻYNY POLIURETANOWE

POLYURETHANE SPRINGS

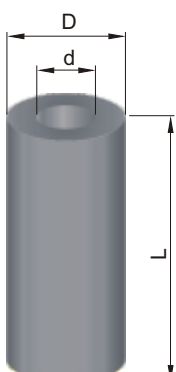

FCPK-Bytów Sp. z o.o.
ul. Lęborska 26, 77-100 Bytów, Poland
tel. +48-59-822-9700, fax +48-59-822-9701
www.fcpk.pl

Typ / Type SU-L				80 Shore A												
	D [mm]	Max. Obciążenie Max. Load [N]	d [mm]	L [mm]												
				12	16	20	25	32	40	50	63	80	100	125	160	
				Obciążenie [N] na każdy mm ugięcia / Load [N] for each mm of compression												
	16	480	6,5	90	80	70	55									
	20	1000	8,5		180	143	115	90								
	25	1900	10,5			270	218	173	136							
	32	2500	13,5					227	178	142	114					
	40	4700	13,5					427	335	268	214	167				
	50	9000	18,0					807	643	514	410	320	257			
	63	12800	18,0					1143	914	730	582	457	366	293		
Max. ugięcie [mm] Max. compression [mm]				35%												
				4,2	5,6	7,0	8,7	11,2	14,0	17,5	22,0	28,0	35,0	43,7	56,0	
Typ / Type SU-M				90 Shore A												
	D [mm]	Max. Obciążenie Max. Load [N]	d [mm]	L [mm]												
				12	16	20	25	32	40	50	63	80	100	125	160	
				Obciążenie [N] na każdy mm ugięcia / Load [N] for each mm of compression												
	16	1100	6,5	300	230	180	150									
	20	2200	8,5		460	360	290	230								
	25	3300	10,5			550	440	340	270							
	32	5000	13,5					520	410	330	260					
	40	9800	13,5					1030	810	650	515	408				
	50	17500	18,0					1825	1450	1160	920	730	580			
	63	28300	18,0					2950	2350	1880	1490	1180	940	755		
Max. ugięcie [mm] Max. compression [mm]				30%												
				3,6	4,8	6,0	7,5	9,5	12,0	15,0	19,0	24,0	30,0	37,0	48,0	
Typ / Type SU-H				95 Shore A												
	D [mm]	Max. Obciążenie Max. Load [N]	d [mm]	L [mm]												
				12	16	20	25	32	40	50	63	80	100	125	160	
				Obciążenie [N] na każdy mm ugięcia / Load [N] for each mm of compression												
	16	1950	6,5	650	487	390	310									
	20	2800	8,5		700	560	450	350								
	25	4220	10,5			844	675	527	422							
	32	7560	13,5					945	756	605	480					
	40	12000	13,5					1500	1200	960	760	600				
	50	18900	18,0					2362	1890	1510	1200	945	756			
	63	30000	18,0					3750	3000	2400	1900	1500	1200	960		
Max. ugięcie [mm] Max. compression [mm]				25%												
				3,0	4,0	5,0	6,3	8,0	10,0	12,5	15,8	20,0	25,0	33,1	40,0	
Przykład zamawiania: Example order:				SU-L050080 80 ShoreA _____ D= 50mm _____ L = 80mm _____												

Uwaga: Na życzenie dostępne są również wałki i płyty poliuretanowe cięte na wymiar.
 Note: On request also available: polyurethane shafts and sheets cut to size.